

Installation Instruction

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.


NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90 °Supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for wet location.

General Wiring Diagram

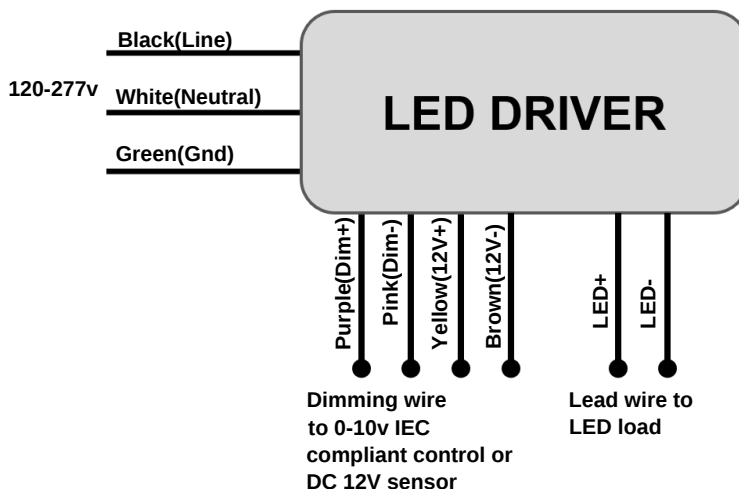


www.auroionled.com
Auroion LED INCORPORATED
261 W. Commercial St., Pomona CA 91768
+1 (626) 366-6817

Installation Instruction

INSTRUCTIONS:

Always turn off the power supply from main circuit breaker first!

Hardware Content

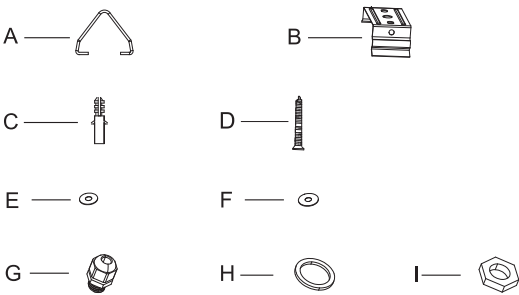


	CONTENTS	2ft/4ft	8ft
A	V-HOOK	2	3
B	SURFACE MOUNT BRACKET	2	3
C	PLASTIC TUBE-6*31mm	2	3
D	SELF-DRILLING SCREW-4*32*7	2	3
E	METEL GASKET-4*12*0.7	2	3
F	RUBBER GASKET-4*12*1	2	3
G	PLUG	1	1
H	SEALING RING	1	1
I	NUT	1	1

Note:


[1] Connect the flexible cord (SJTW 18AWG,not included) to the driver input wires. Be sure to connect the wet location rated strain relief(included)to the Knock-out on the housing.

A: Surface Mounting


1.Release latches by pulling top of latch away from the housing. Detach LED tray and lens from fixture.

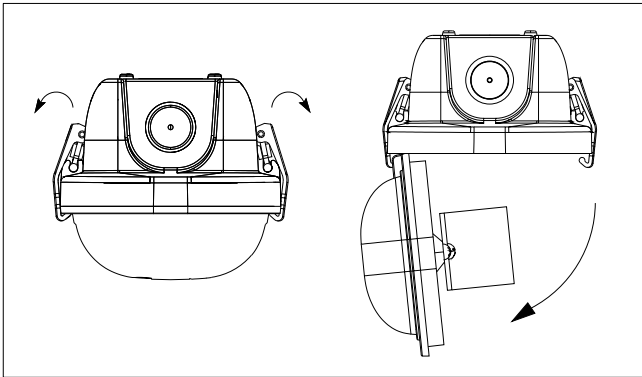


3.Reattach LED tray and lens to fixture by reversing step 1.

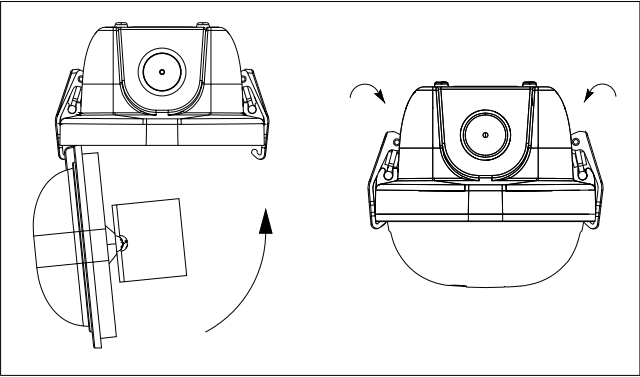

2.Connect power cord to driver as below figure shown [1]. (the flexible cord supplied by others).

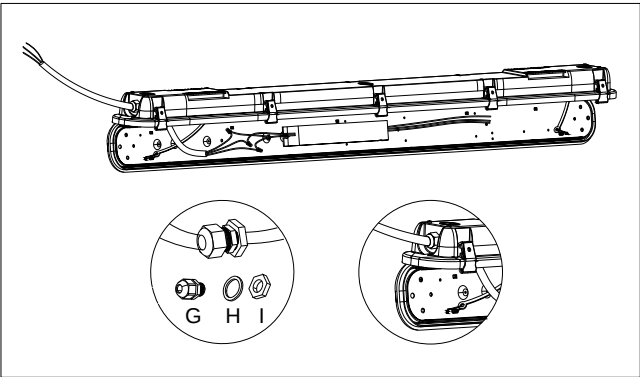


4.Locate and drill holes, then install clips to the ceiling surface using hardware found in hardware kit.

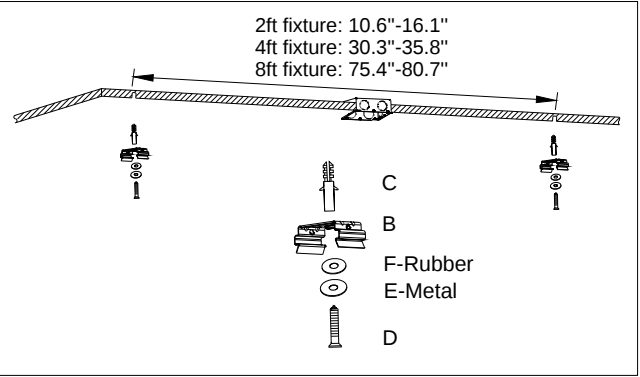


Installation Instruction

5. Connect fixture to AC power refer to General Wiring Diagram.

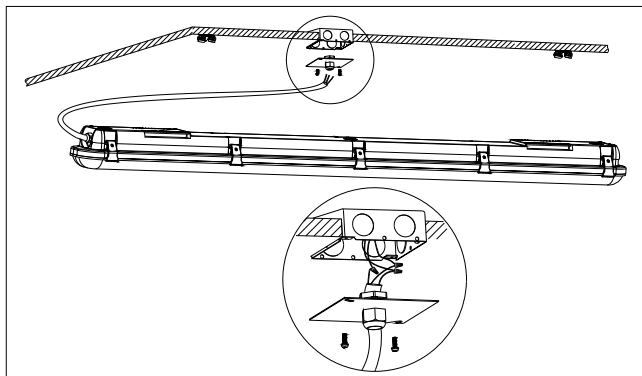


6. Press fixture housing to the clips until both sides of the housing recesses are secured.

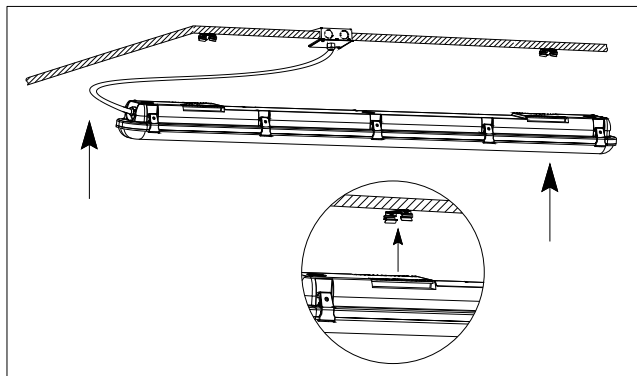


B: Chain Suspended Mounting


1. Release latches by pulling top of latch away from housing. Detach LED tray and lens from fixture.

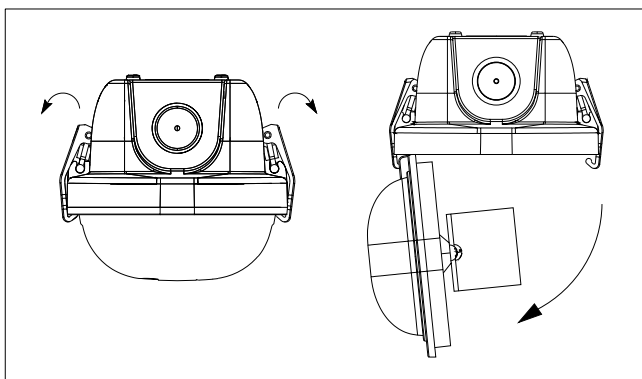


2. Connect an appropriate length of power cord to driver as shown in below figure^[1]. (the flexible cord supplied by others)

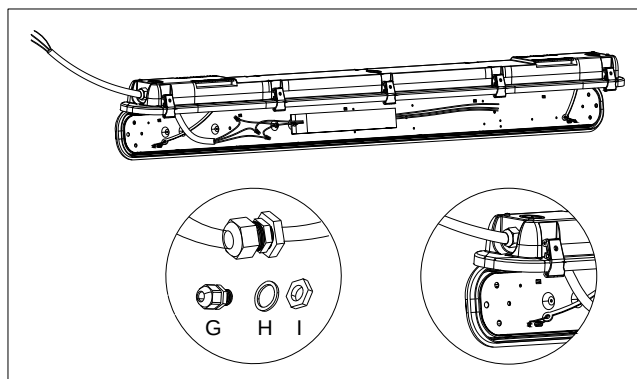

3. Secure mounting clips to fixture housing recesses by firmly pressing them into place, then attach V-hooks to each mounting clip.

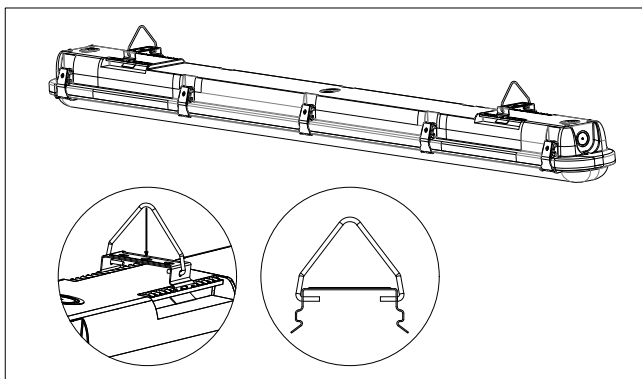


4. Hang the fixture by attaching the V-hooks to chains. Make wiring connection to Power supply accord to local laws and regulations.

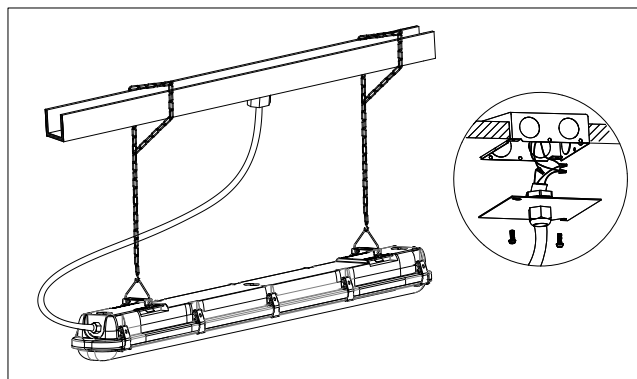


Installation Instruction

C: Cable Suspended Mounting


1. Release latches by pulling top of latch away from housing. Detach LED tray and lens from fixture.

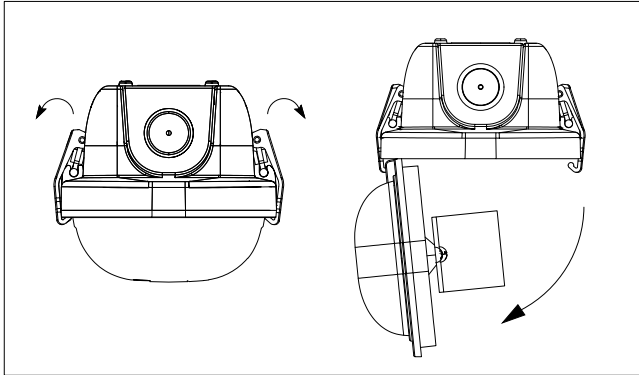


3. Secure mounting clips to fixture housing recesses by firmly pressing them into place.

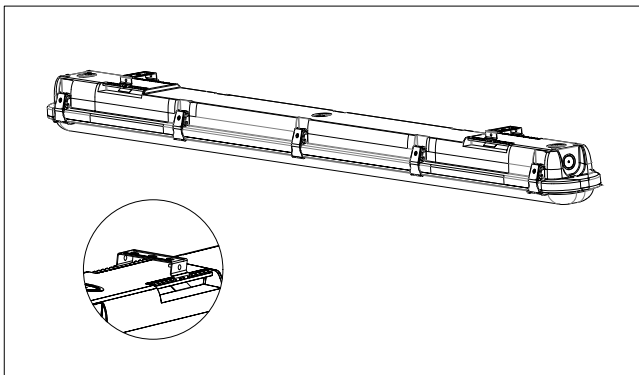

2. Connect an appropriate length of power cord to driver as shown in below figure^[1]. (the flexible cord supplied by others)

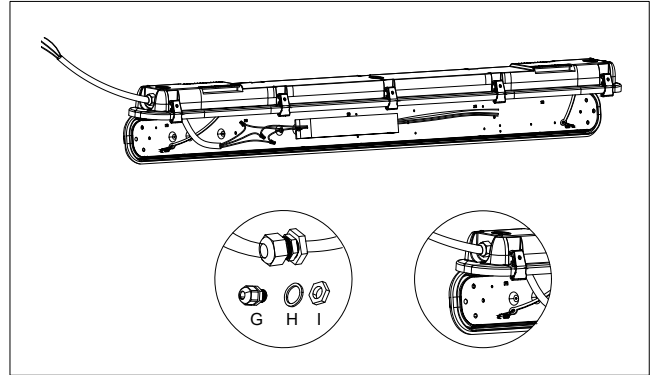

4. Attach the ends of aircraft cable to the clips as shown. Adjust aircraft cable to make fixture at a proper height by quick cable-lock. Make wiring connection to Power supply accord to local laws and regulations.

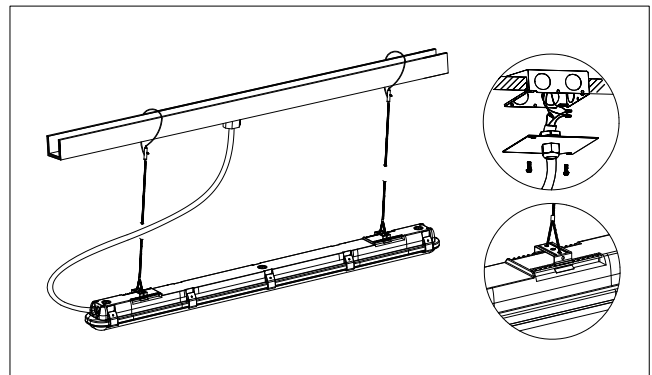


Installation Instruction

Additional Accessories


▪ Standalone DC Sensor

▪ IFS08-ET


1. Release latches by pulling top of latch away from housing. Detach integrated light-part(LED tray and lens) from fixture.

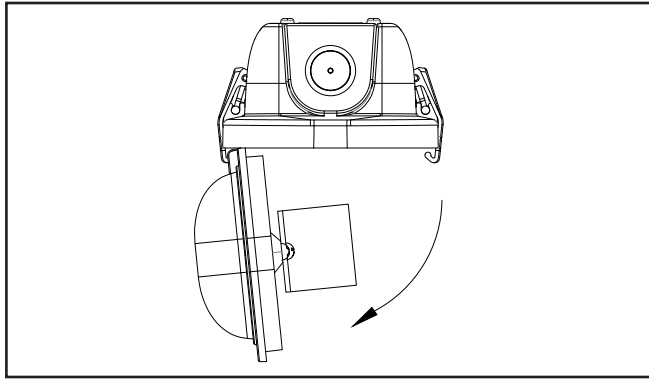


2. Remove the sensor hole knockout from the LED tray using appropriate tool.

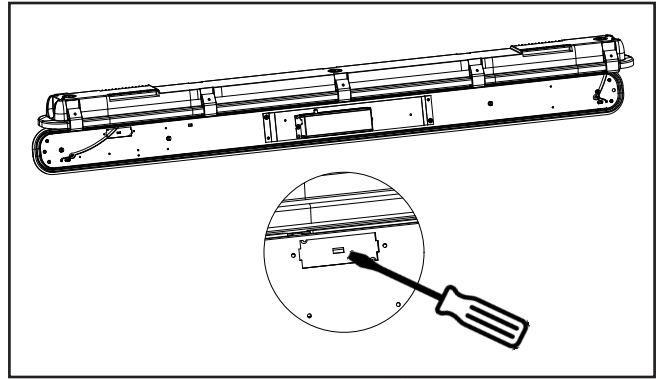

3. Connect the flat cable to the sensor terminal, then install the sensor into the hole.

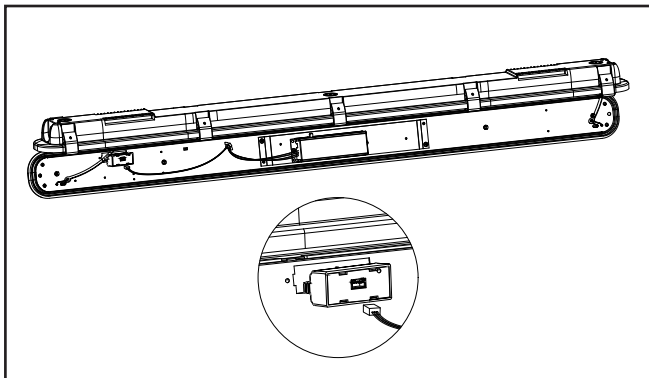

4. Reattach light-part to fixture by reversing step 1, then fasten the latches back firmly.

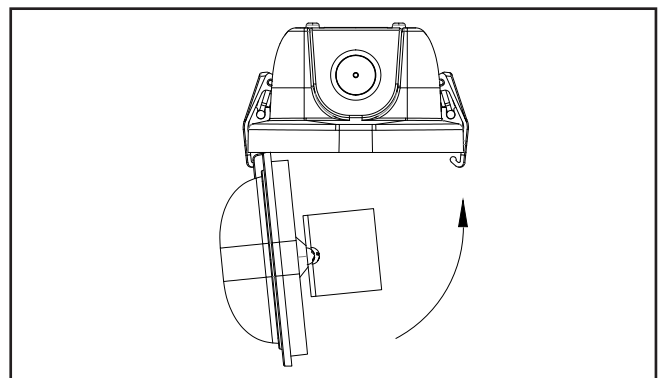

General Wiring Diagram

