




BRIGHTLINEPRO65
BRIGHTLINEPRO92
BRIGHTLINEPRO130

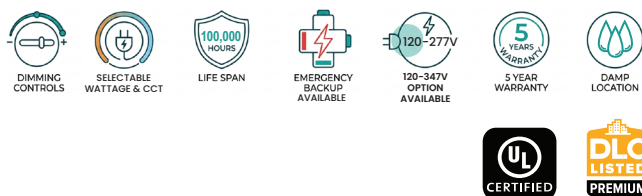

SPECIFICATIONS

Electrical:

- Input voltage: Universal 120-277V, 50 - 60Hz rating
- Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V aux integrated driver ranges from 0.1V to 0.5V

Construction:

- Stamped sheet metal housing
- Highly durable white finish
- Frosted PMMA Lens

Certifications & Regulatory:

- UL Listed, Damp Location
- DLC 6.0 P

Warranty:

- 5 year labor warranty (see complete warranty terms for details)

Testing:

- IESNA LM-79 & IESNA LM-80 tested by 3rd-party laboratory

Performance:

- Suitable for damp locations
- CCT: 5000K
- Flicker-free 0-10V dimming capability, down to 10%
- Operating temp range: -4°F to 122°F (-20°C to 50°C)
- Accurate colors: CRI≥80
- Long-life, high-efficacy, micro-power LEDs
- Lumen maintenance, L70 > 100,000 hours
- Power Factor: ≥0.9 for stable performance

INDUSTRIAL SERIES

BRIGHTLINEPRO 65/92/130

2FT LINEAR HIGH BAYS

TOP FEATURES

- Smart Sensor-Ready**
- Extreme Environment Ready**
- UL Listed for Damp Locations
- DLC 6.0 Premium Listed
- Universal 120-277 Voltage, 6kV Protection (6kV Common, 4kV Differential)
- Over Temperature Protection
- Lumen Maintenance L70 100,000-Hour Lifespan
- Up to 150 lm/W High Efficacy Performance
- Smooth, consistent 0-10V Flicker-free Continuous Dimming
- Fixed 5000K CCT with CRI≥80

BENEFITS

- Ultra-High Efficiency:** Maximizes energy savings with an exceptional efficiency of up to 150 lm/W and features a premium frosted PMMA lens for uniform light distribution
- Extreme Lifespan & Warranty:** Engineered for long-term commercial reliability with an incredible L70 lifespan of 100,000 hours
- Advanced Control Integration:** Smart sensor-ready, smooth flicker-free 0-10V continuous dimming for effortless automation and compliance
- Industrial-Grade Reliability:** Features a universal 120-277V driver with integrated 6kV surge protection (6kV Common, 4kV Differential Mode), and top-tier UL & DLC 6.0 Premium safety and performance certifications

APPLICATIONS

Open-Plan Corporate Offices
Conference Rooms
Boardrooms
Medical Clinics
Hospital Corridors
Dental Clinics
Retail Showrooms
Supermarkets
K-12 Classrooms

Lecture Halls
University Libraries
Study Areas
Hospital Corridors
Nurses' Stations
Government Offices
Municipal Buildings
Electronic Assembly Lines

Cleanrooms
Commercial Kitchens
Food Prep Areas (Dry Zones)
Climate-Controlled Warehouses
Fulfillment Picking Hubs
Commercial Garages
Loading Control Rooms

PERFORMANCE

AL-LHBO-2FT/65-50


65W
LUMENS:
8645
EFFICACY (lm/W):
150
COLOR ACCURACY (CRI):
80

AL-LHBO-2FT/92-50

92W
LUMENS:
13800
EFFICACY (lm/W):
150
COLOR ACCURACY (CRI):
80

AL-LHBO-2FT/130-50

130 W
LUMENS:
19500
EFFICACY (lm/W):
150
COLOR ACCURACY (CRI):
80

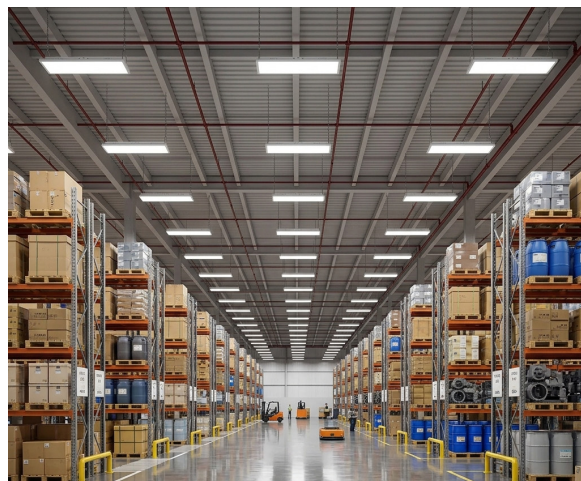


BRIGHTLINEPRO 65/92/130

2FT LINEAR HIGH BAYS, SENSOR-READY
(AL-LHBO)


Catalog Number
Notes
Type

ORDERING MATRIX

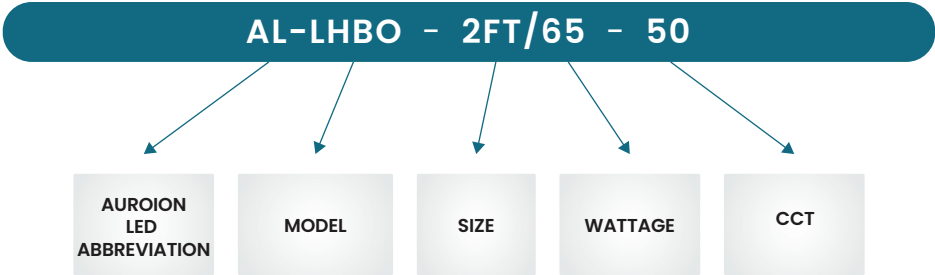

ORDERING INFORMATION: AL-LHBO				
MODEL	SIZE	WATTAGE	VOLTAGE	CCT
AL-LHBO = LINEAR HIGH BAY, SENSOR-READY	2FT/	65 = 65W	[BLANK] = 120-277V	50 = 5000K
		92 = 78W		
		130 = 130W		

ACCESSORIES

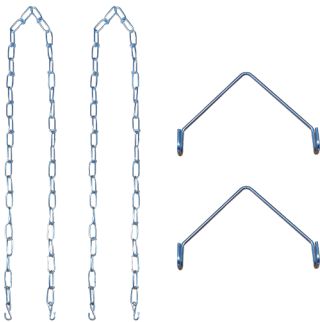


V-HOOK & CHAIN
(INCLUDED)

BRIGHTLINEPRO 65/92/130

2FT LINEAR HIGH BAYS, SENSOR-READY
(AL-LHBO)

Catalog Number
Notes
Type


DIMENSIONS

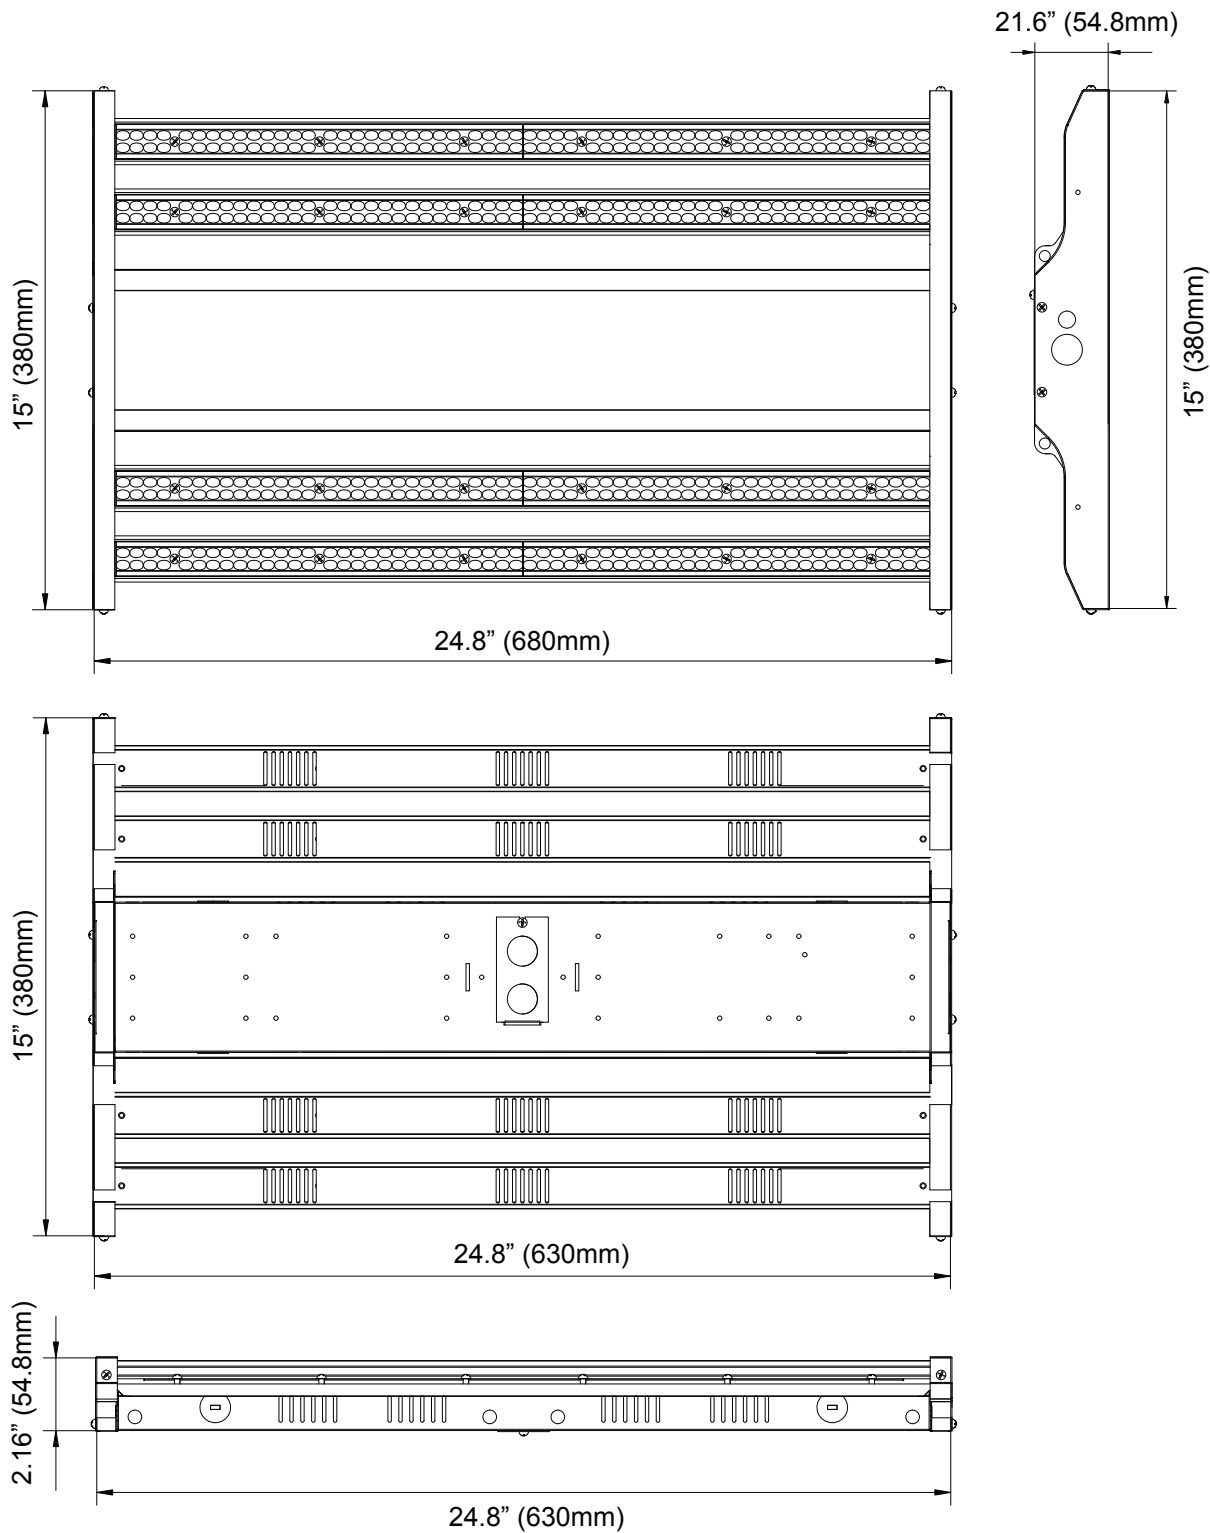

2FT LINEAR HIGH BAYS, SENSOR-READY (AL-LHBO)

Catalog Number
Notes
Type


Polar Light Distribution Diagram

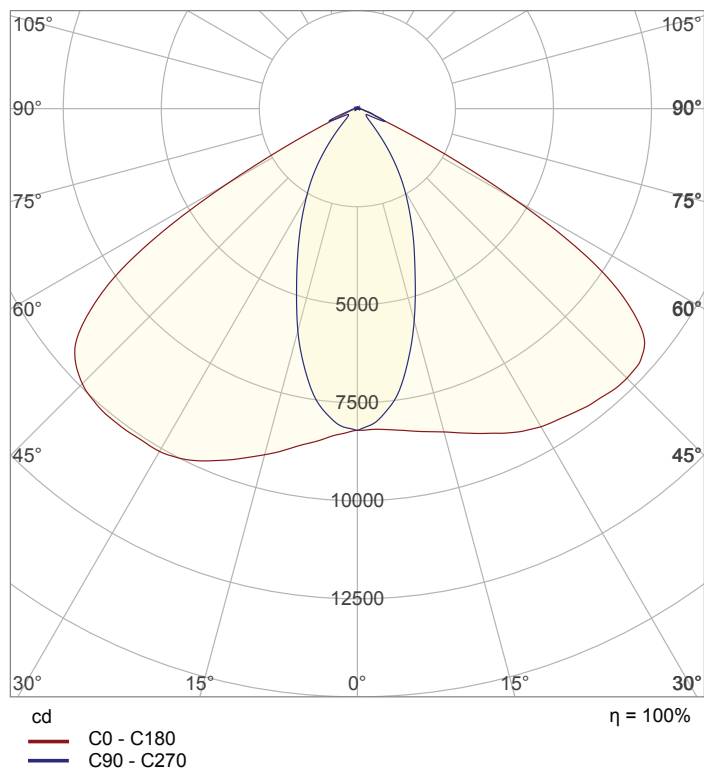

87.6W @ 2700K

Beam Details

*measured at center of beam

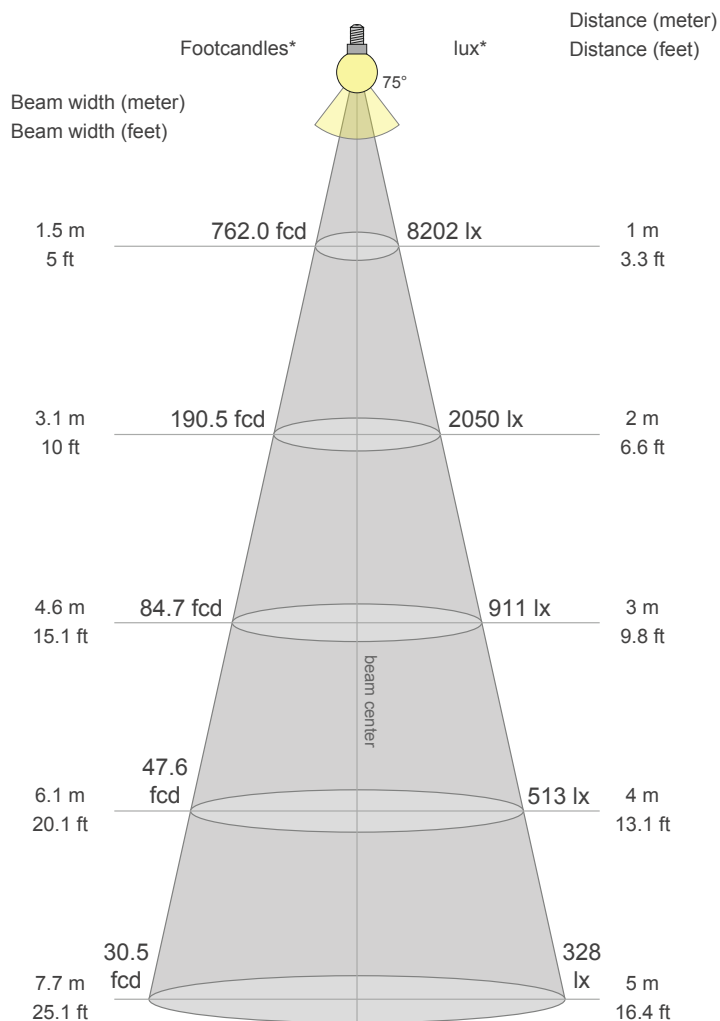

AUROION LED
261 W. Commercial St. Pomona CA, 91768
626.331.0025
sales@auroionled.com

auroionled.com